

PROJECT:	TYPE:
LOCATION:	CAT:



### Description

Specifically designed for flooring, the Helm is suitable for use with tile floors and other walk-over applications. When fully sealed with neutral cure silicone sealant, the Helm can be used in outdoor recessed lighting applications as well.

### Features

- Extruded aluminum construction
- Use tape light, lens, and end caps to create a complete fixture (tape light and accessories sold separately)

### Mounting



Recess mount via construction adhesive or frost resistant/elastic ceramic glue (For in-ground installations or for areas with exposure to moisture or heavy loads, special order products may be needed such as polystyrene foam board, sealants, or adhesives; please consult a professional installer)

### Applications

Recessed applications, walk-over areas, building facades, pathways, bathrooms, and pool areas

The aluminum is not meant to be poured into concrete in its current state. Exposure to green (fresh) concrete may cause aluminum to decay. Pouring this fixture in concrete is not recommended. It is recommended to place spacers when the concrete is poured for the lights to sit in, then be grouted or siliconed in.

## Profile Dimensions

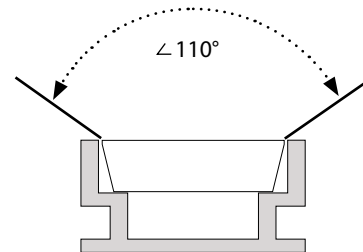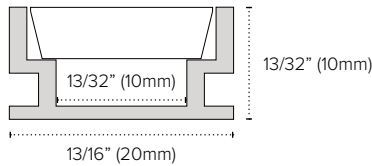

## Ordering Information

Part Number	Description
PE-HELM-1M	Helm Aluminum Extrusion
PE-UVHELM-1M	Frosted Polycarbonate UV Lens
PE-HELM-FEED	Polypropylene Plastic End Cap With Hole
PE-HELM-END	Polypropylene Plastic End Cap

\*Helm extrusion is available as special order only.  
For special orders, please contact us at: [Quotes@PrizmLighting.com](mailto:Quotes@PrizmLighting.com)