

PROJECT:  TYPE:

LOCATION:  CAT:



### Description

Class 2 constant voltage driver in either 12V DC or 24V DC outputs

### Features

- 12V or 24V DC constant voltage hardwire driver; 8W capacity
- Non-dimmable on primary side; Utilize secondary side for Prizm controls or PWM dimming
- Universal AC input / Full Range
- Protections: Over Current / Short Circuit / Over Voltage / Over Temperature
- Built-in constant current limiting circuit
- Fully isolated plastic case with IP42 design
- Class 2, Class II (no FG)
- Input via 5" 18AWG conductors
- Output via 5" 20AWG conductors

### Mounting

Set upon flat surface or house in an enclosure

### Applications

Suitable for LED lighting

### Warranty


2 years

## Technical Information



Model	LED-DR8-12	LED-DR8-24
Output DC Voltage	12V DC	24V DC
Rated Current	2.5A	1.25A
Maximum Load	8W (non-dimming); 5W (dimming*)	
Minimum Load	1W (non-dimming); 1W (dimming*)	
Input Voltage Range	100-240V AC (0.45A)	
Frequency Range	50/60Hz	
Power Factor	PF>0.95/115V AC, PF>0.9/230V AC at full load	
Efficiency	82.5%	84%
Dimming	Non-dimmable on primary side; Utilize secondary side for Prizm controls or PWM dimming*	
Short Circuit Protect	Hiccup mode, recovers automatically after fault condition is removed	
Over Voltage Protect	Shut down o/p voltage, re-power on to recover	
Over Load Protect	Hiccup mode, recovers automatically after fault condition is removed	
Operating Temp	-22°F to 158°F (-30°C to 70°C)	
Operating Humidity	20 ~ 95% RH non-condensing	
Rating	Class 2; cULus for indoor use only; RoHS Compliant Suitable for use in dry and damp locations	


### Dimensions

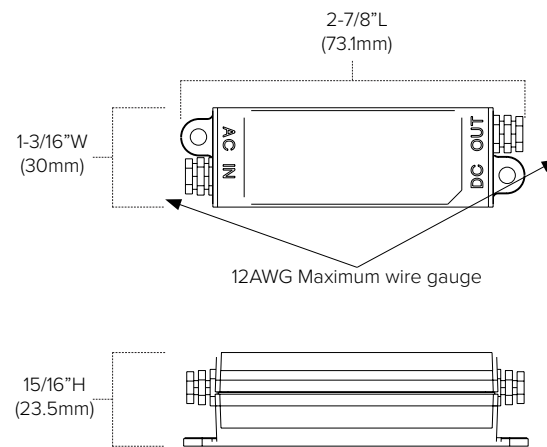

\*Utilize Prizm controller + receiver combo on secondary side (sold separately); PWM dimming will consume ±3W internally  
Zero load power consumption: <0.5W

## Ordering Information

**LED-DR30  
Driver**



### LED-DR8-12 includes:

(1) 12V DC Constant Voltage Power Supply


### LED-DR8-24 includes:

(1) 24V DC Constant Voltage Power Supply

Example Part # LED-DR8-12




## Accessories


Image	Part Number	Description
	ENCL-11	Galvanized steel wiring enclosure; 11-1/2"L x 1-7/8"W x 1-3/4"H

## Additional Information


### Derating Curve

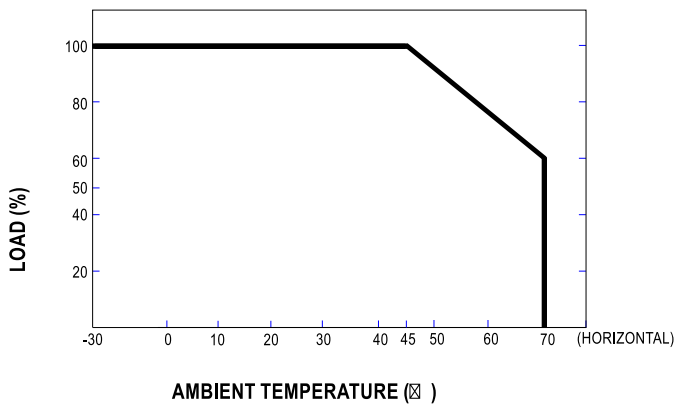

### Static Characteristics

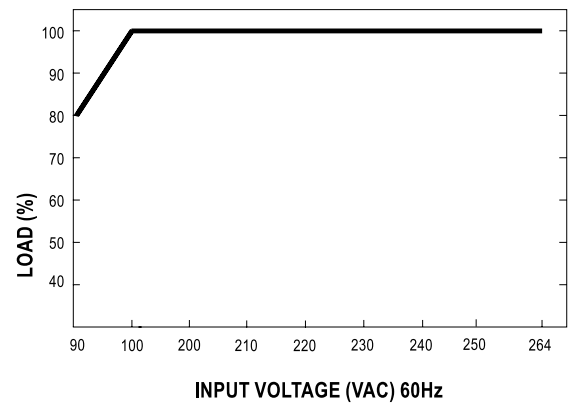

### Block Diagram

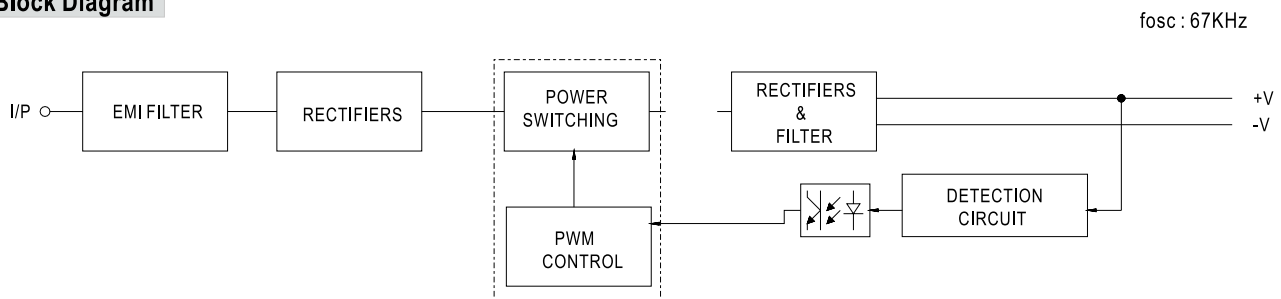

## NOTES

---



---



---



---



---